



## SPECIFICATION

|                       |                                      |
|-----------------------|--------------------------------------|
| Rated voltage         | 120 / 230Vac (+/-10%), 50/60Hz       |
| Temperature range     | -40°C to +50°C                       |
| Rated current         | 0.4/0.25                             |
| Absorbed power        | 0-25W                                |
| Rated speed           | 400 to 2400rpm (+/-1%)               |
| Speed selection       | 3 discrete programmable speeds.      |
| Direction of rotation | CCW, CW, reversible                  |
| Reverse Speed         | Timed reverse programmable options.  |
| Motor Protection      | Electronically / Thermally Protected |
| Ground Protection     | Double Insulation                    |
| Insulation Class      | Class B                              |
| Bearing               | 608 sealed ball bearings             |
| Approvals             | UL / TÜV / CE / RCM / CCC / ATEX*    |
| Ingress protection    | IP66*                                |


\*Option on request : Please discuss with our representative.

## WIRING DIAGRAM



BLACK Control Wire  
BLUE Neutral  
BROWN Phase

## PERFORMANCE

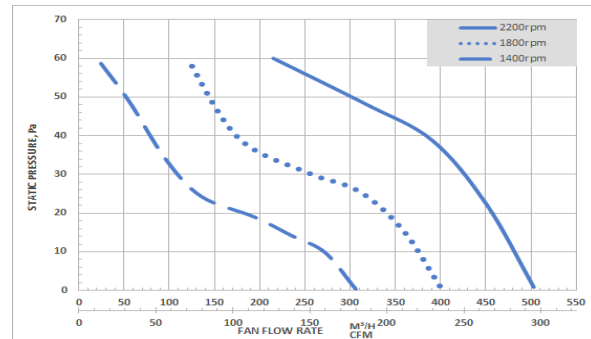

## DIMENSION

