



UC 300 SERIES
UC 39
FM303209


DATASHEET
UC 39




SPECIFICATION

Rated voltage	120 - 240 VAC 50/60Hz
Temperature range	-40°C to +50°C
Rated current	0.95/ 0.5A
Nominal output power	39 W
Rated speed	400 to 1800 RPM
Speed selection	3 Discrete Speeds; Programmable
Direction of rotation	CW; CCW
Timed reverse	Optional; Programmable
Motor Protection	Electronically protected (EP)
Ground Protection	Class I
Thermal management	Torque compensation in overload conditions
Insulation Class	Class B
Shaft diameter	8mm; 7mm D; drive flange and twin shafts available
Bearings	608 sealed ball bearings
Approvals	UL
Ingress protection	IP55

WIRING DIAGRAM :

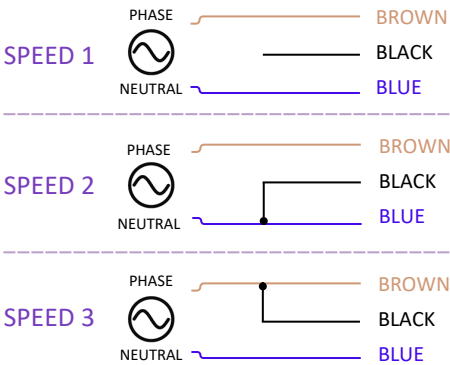

PERFORMANCE :

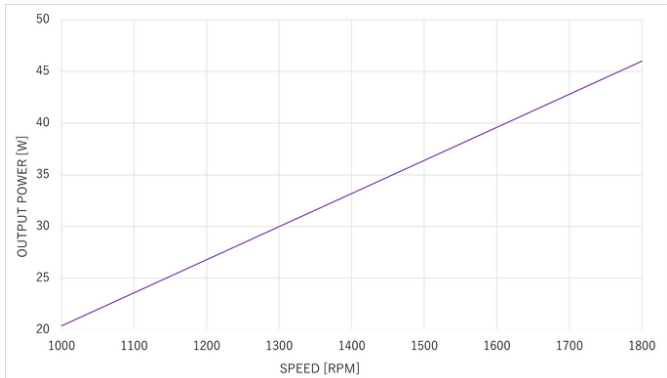

DIMENSION :

