

UNADA

LAGRANGE SERIES
LAGRANGE 254
LAG254

DATASHEET
LAG254



SPECIFICATION


Rated voltage	110 - 240 VAC 50/60Hz
Temperature range	-40°C to +50°C
Max. input power	52 W
Rated speed	400 to 2450 RPM
Speed Selection	3 Discrete Speeds; Programmable
Direction of rotation	CCW; Reversible
Motor Protection	Electronically Protected (EP)
Ground Protection	Double Insulated
Approvals	UL / CE / TÜV / ATEX*
Ingress protection	IP66
Hydrocarbon Compatibility	EN60335-2-89 ANNEX BB

* Optional, single-voltage

FEATURES :

- Ultra-High Efficiency
- Low Noise
- Soft Start
- Resonance mitigation
- Low Profile

PERFORMANCE :

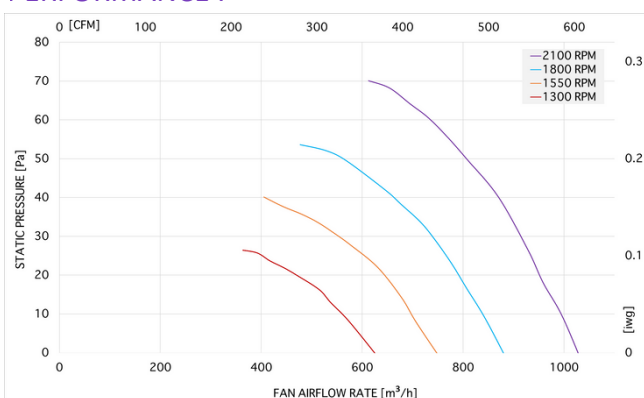

DIMENSION :

