

UNADA

LAGRANGE SERIES
LAGRANGE 306
LAB306

DATASHEET
LAB306



Patent pending


SPECIFICATION

Rated voltage	120 - 240 VAC 50/60Hz
Temperature range	-40°C to +50°C
Max. input power	73 W
Rated speed	400 to 1800 RPM
Speed Selection	3 Discrete Speeds; Programmable
Direction of rotation	CCW; Reversible
Motor Protection	Electronically protected (EP)
Ground Protection	Class I
Approvals	UL / CE
Ingress protection	IP55
Airflow direction	Blowing (B)

FEATURES :

- High Efficiency
- Low Noise
- Soft Start
- Unada thermal management

PERFORMANCE :

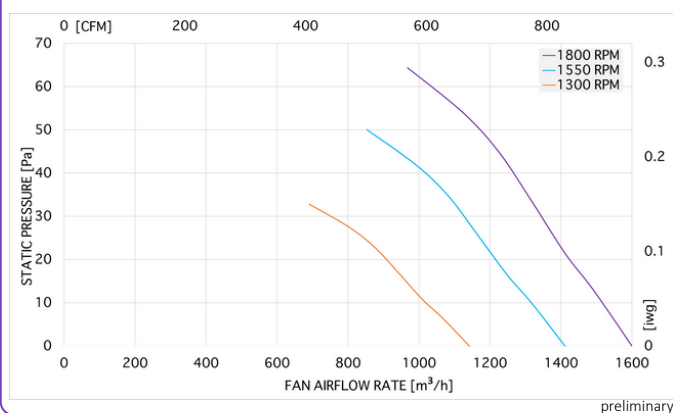

DIMENSION :

