



UNADA

CATALOGUE

2026

JAN

INDEX

FAN SOLUTIONS

- LAGRANGE SERIES
AIRFLOW
EXTERNAL VIEW
WIRING DIAGRAMS



EC MOTORS

- UC 100 SERIES
- UC 300 SERIES
- UC 400 SERIES

LAGRANGE SERIES

SHAPED BY DATA: Our second generation UNADA EC fanpacks, the Lagrange series, sets an unrivalled level of efficiency for refrigeration solutions. Optimized for food retail and food service applications, the Lagrange Series is the ideal solution for OEMs seeking energy savings.

By closely collaborating with technology leaders in refrigerated cases, the new designs are the direct result of application data and expertise from customer cooperation with cutting-edge machine learning-aided design. The final product is optimized for low profile and quiet operation. A seamless drop-in solution, users of the first generation can now benefit from this leading industry technology

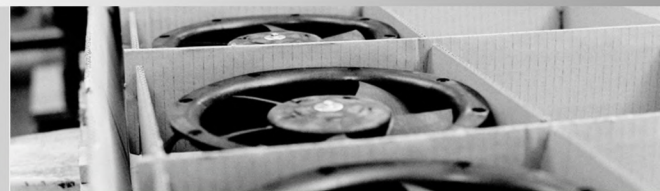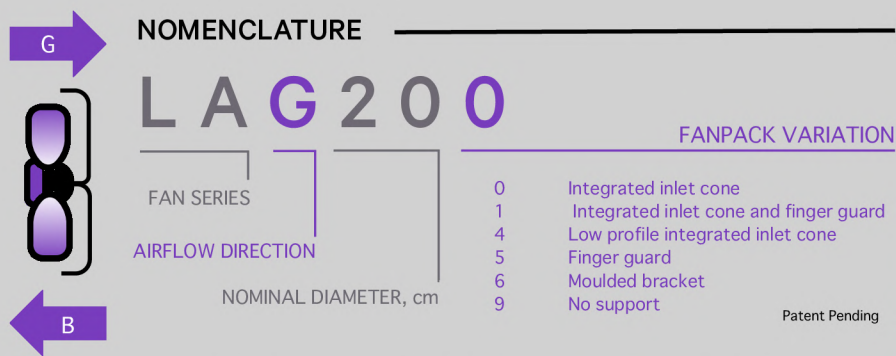

SPECIFICATIONS


TEMPERATURE RANGE	-40°C to +50°C
SPEED SELECTION	3 Discrete Speeds; Programmable
TIMED REVERSE	Optional; Programmable
BEARINGS	Sealed ball bearings
INSULATION CLASS	Class B
MOTOR PROTECTION	Electronically protected (EP)

MODEL	NOMINAL DIAMETER cm inches	RATED VOLTAGE VAC	FREQUENCY Hz	PHASE	RATED SPEED RPM	MAX FREE AIR FLOW m³/h cfm	1550 RPM FREE AIR FLOW m³/h cfm	APPROVALS	IP RATING	AIRFLOW DIRECTION	AIRFLOW CURVES	EXTERNAL VIEW	WIRING DIAGRAM
LAG170	17 7	120/230	50/60	1~	400 to 2400	510 300	340 200	UL / CE / TÜV / ATEX	IP66	Sucking (G)	QA	VA	WA
LAG179	17 7	120/230	50/60	1~	400 to 2400	510 300	340 200	UL / CE / TÜV / ATEX	IP66	Sucking (G)	QA	VB	WA
LAG200	20 8	120/230	50/60	1~	400 to 2400	850 500	570 340	UL / CE / TÜV / ATEX	IP66	Sucking (G)	QB	VC	WA
LAG209	20 8	120/230	50/60	1~	400 to 2400	850 500	570 340	UL / CE / TÜV / ATEX	IP66	Sucking (G)	QB	VD	WA
LAG230	23 9	110-240	50/60	1~	400 to 2000	1000 590	780 460	UL / CE / TÜV	IP66	Sucking (G)	QC	VE	WA
LAG239	23 9	110-240	50/60	1~	400 to 2000	1000 590	780 460	UL / CE / TÜV	IP66	Sucking (G)	QC	VF	WA
LAG254	25 10	110-240	50/60	1~	400 to 2000	920 540	760 450	UL / CE / TÜV	IP66	Sucking (G)	QD	VG	WA
LAG305	30 12	120-240	50/60	1~	400 to 1800	1520 890	1290 760	UL	IP55	Sucking (G)	QE	VH	WB
LAB305	30 12	120-240	50/60	1~	400 to 1800	1520 890	1290 760	UL	IP55	Blowing (B)	QE	VI	WB
LAG306	30 12	120-240	50/60	1~	400 to 1800	1600 940	1410 830	UL	IP55	Sucking (G)	QF	VJ	WB
LAB306	30 12	120-240	50/60	1~	400 to 1800	1600 940	1410 830	UL	IP55	Blowing (B)	QF	VK	WB
LAG309	30 12	120-240	50/60	1~	400 to 1800	1600 940	1410 830	UL	IP55	Sucking (G)	QF	VL	WB
LAB309	30 12	120-240	50/60	1~	400 to 1800	1600 940	1410 830	UL	IP55	Blowing (B)	QF	VM	WB


AIRFLOW

230 VAC 50 Hz; STANDARD MOTOR OPTION AMCA 210 INSTALLATION FIG. 15; FREE INLET, FREE OUTLET; 1.2 kg/m³ AIR.


QA

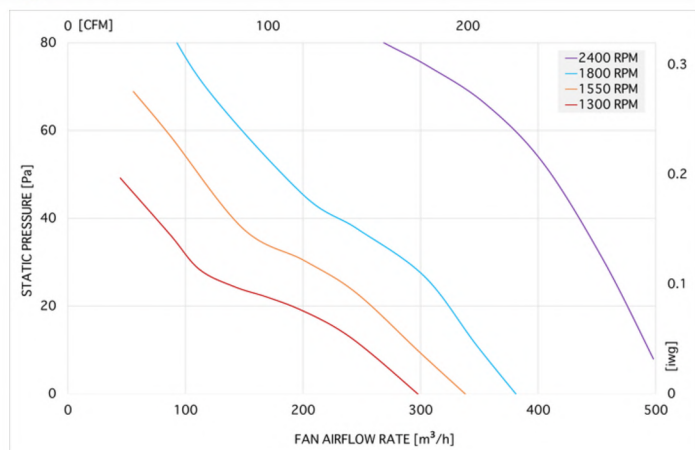


QD

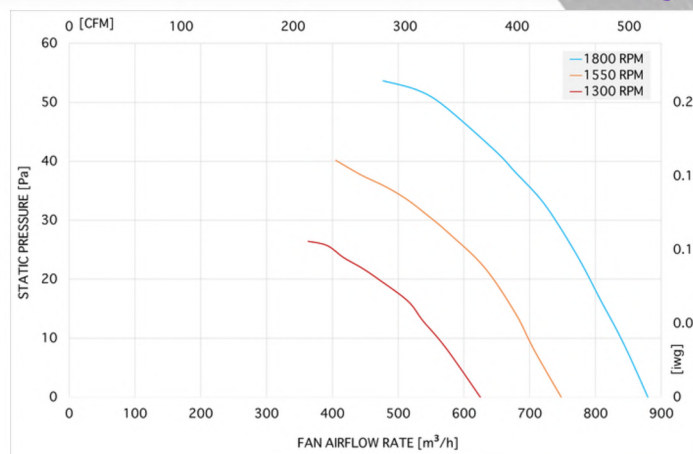


QB

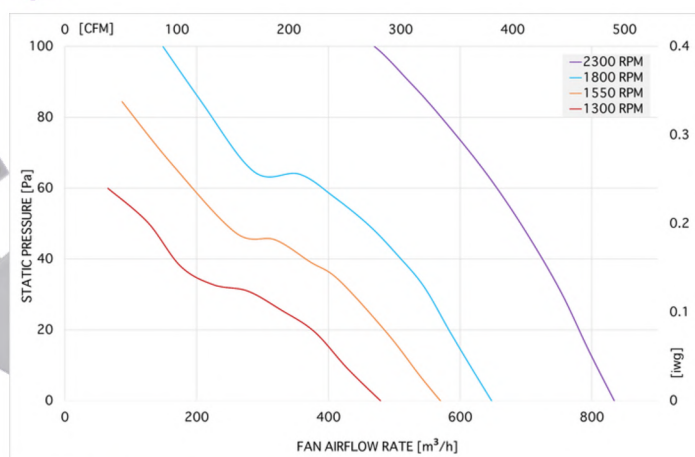


QE

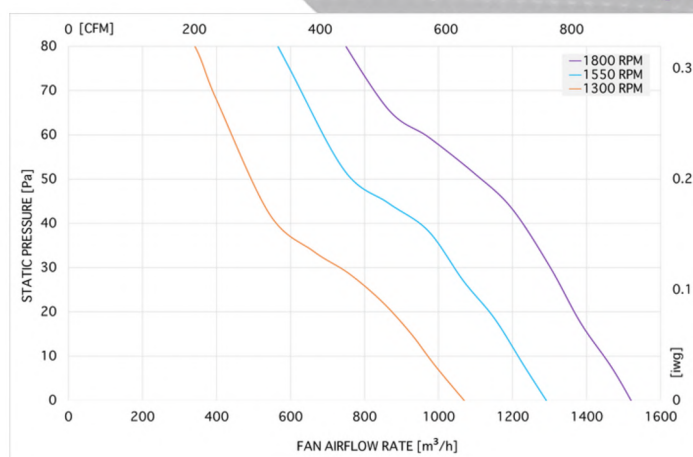


QC

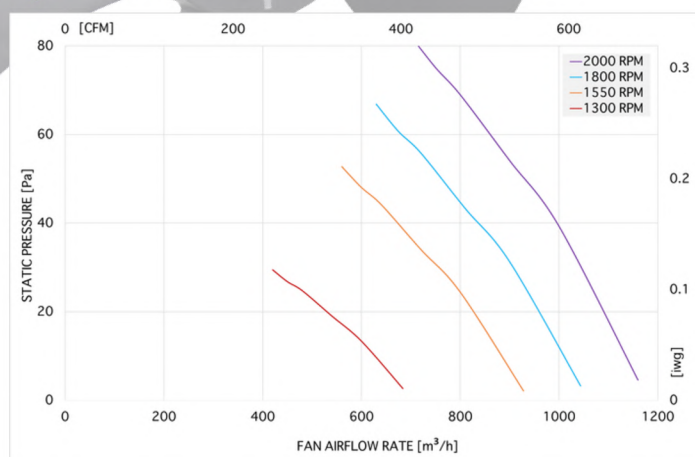


QF

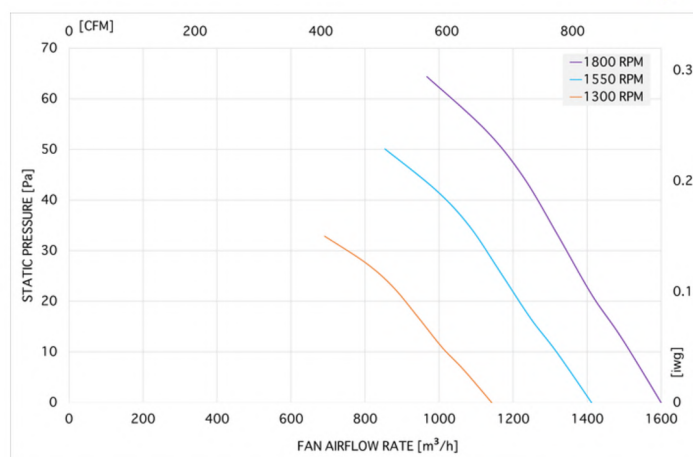


VA

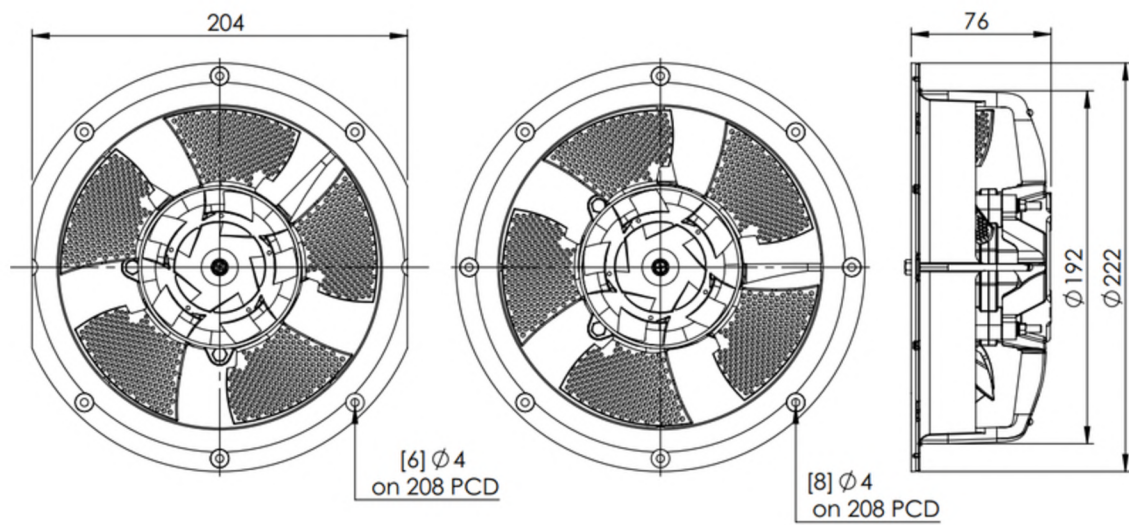

VB

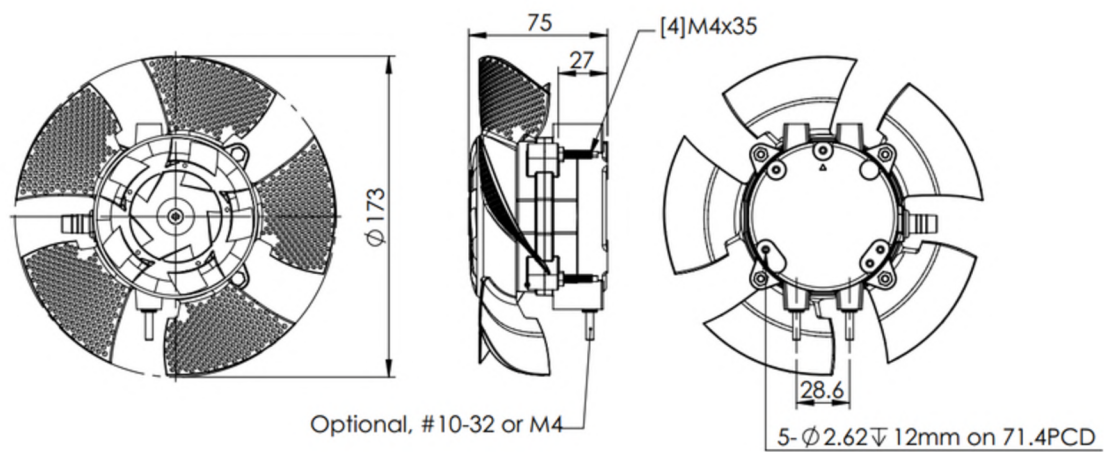


VC

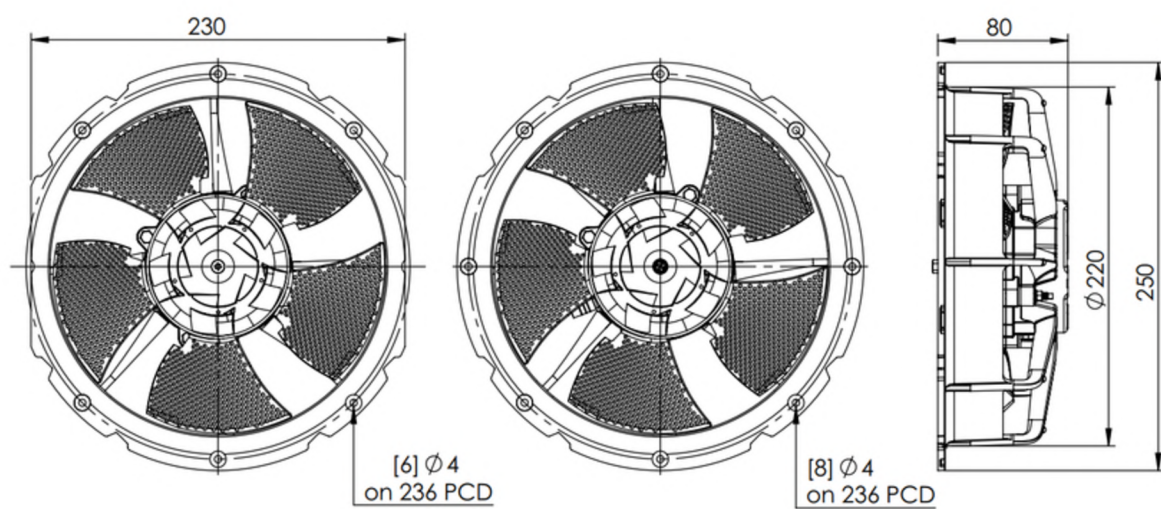


EXTERNAL VIEW


VD

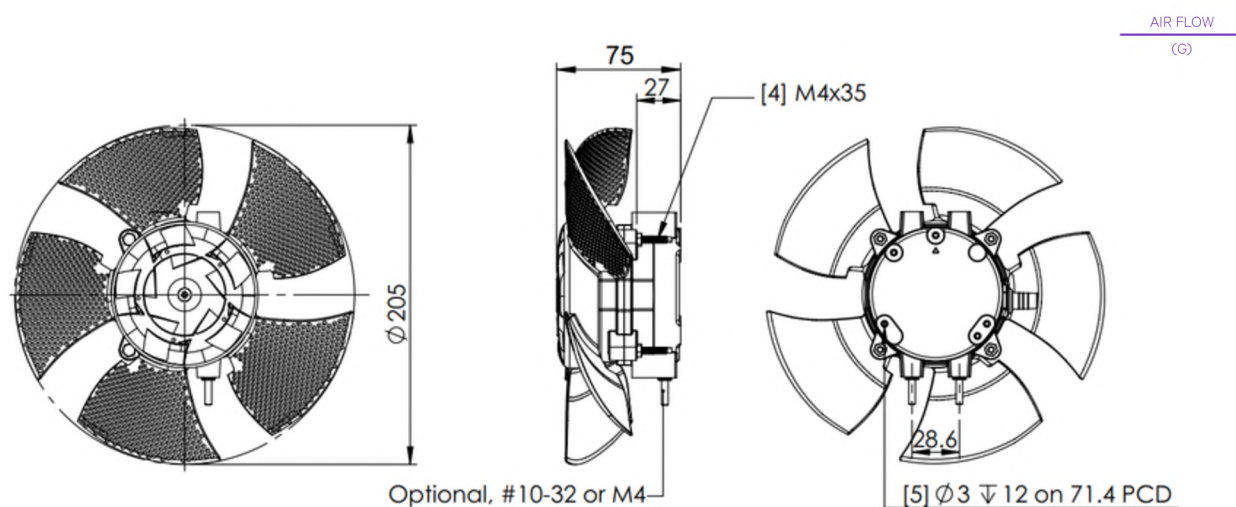


VE

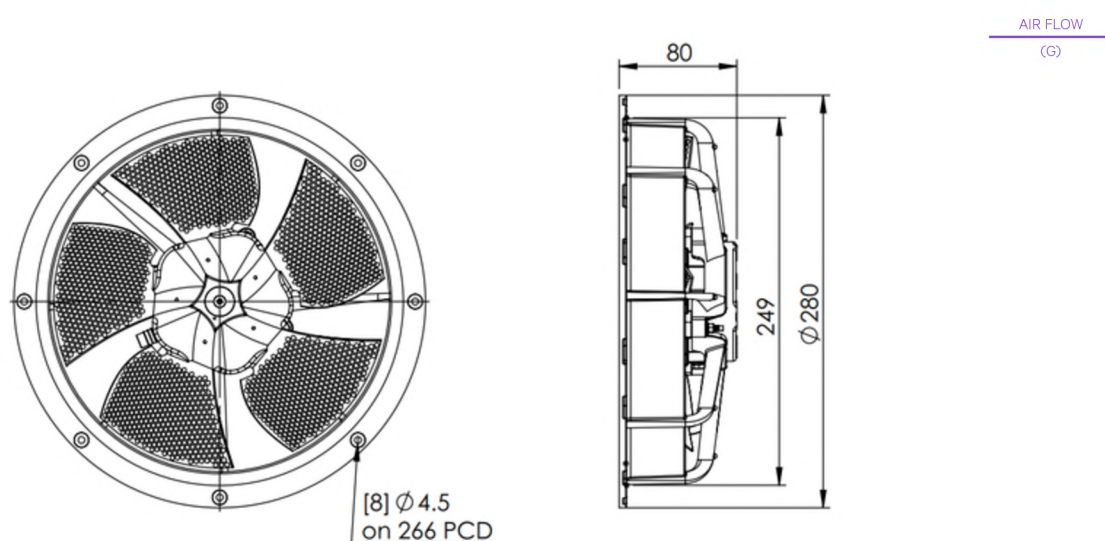


VF

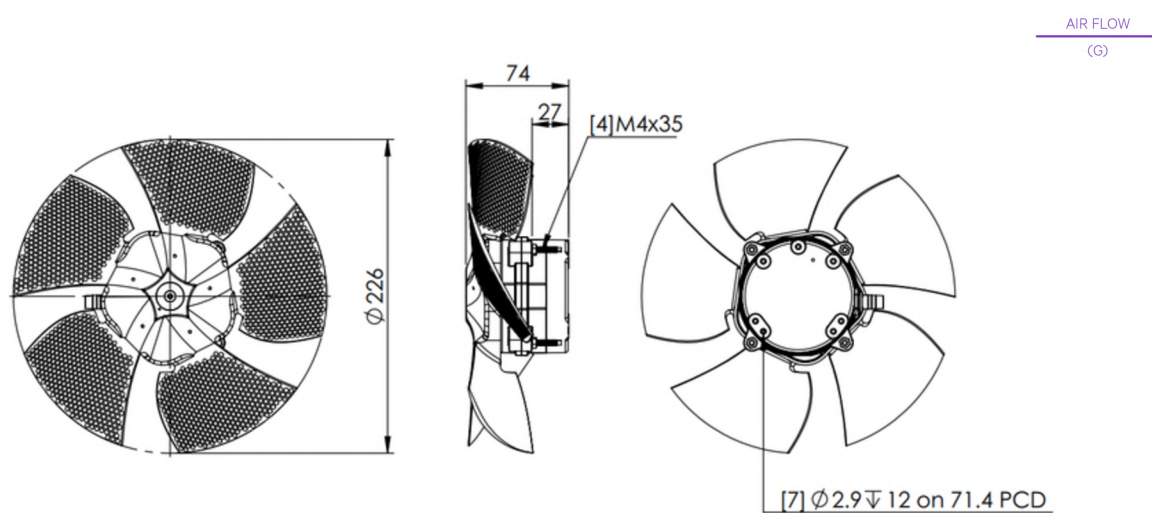


VG

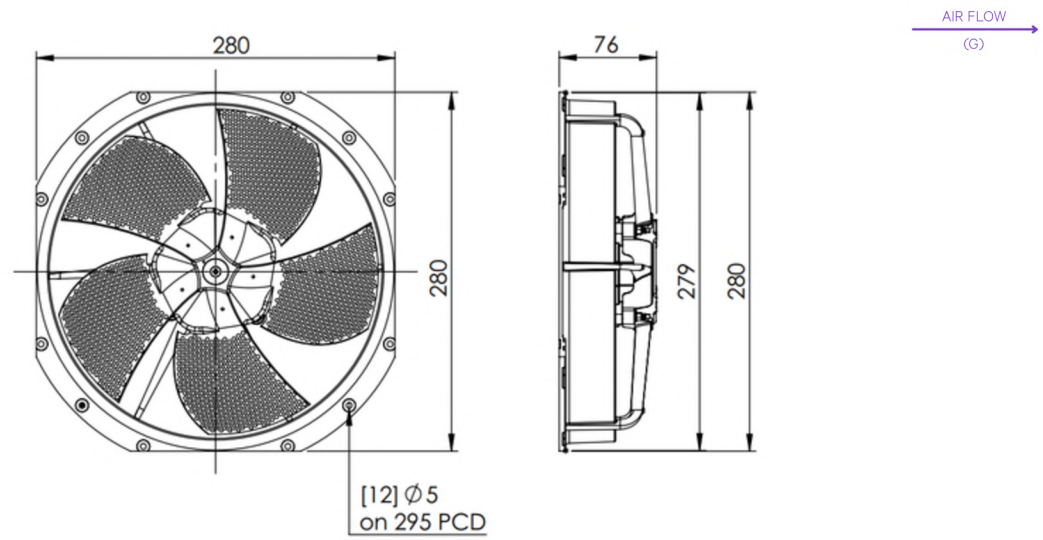


VH

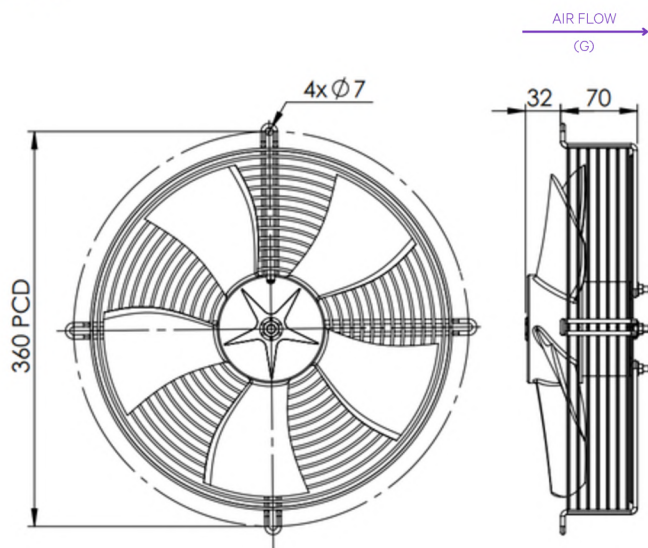

VI

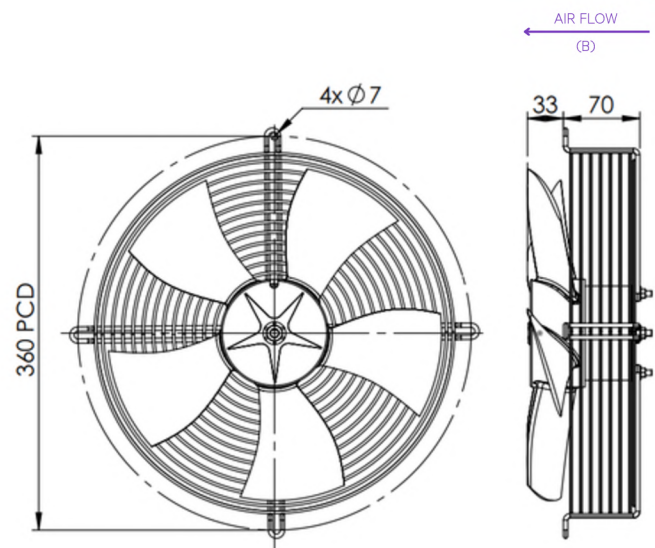


VJ

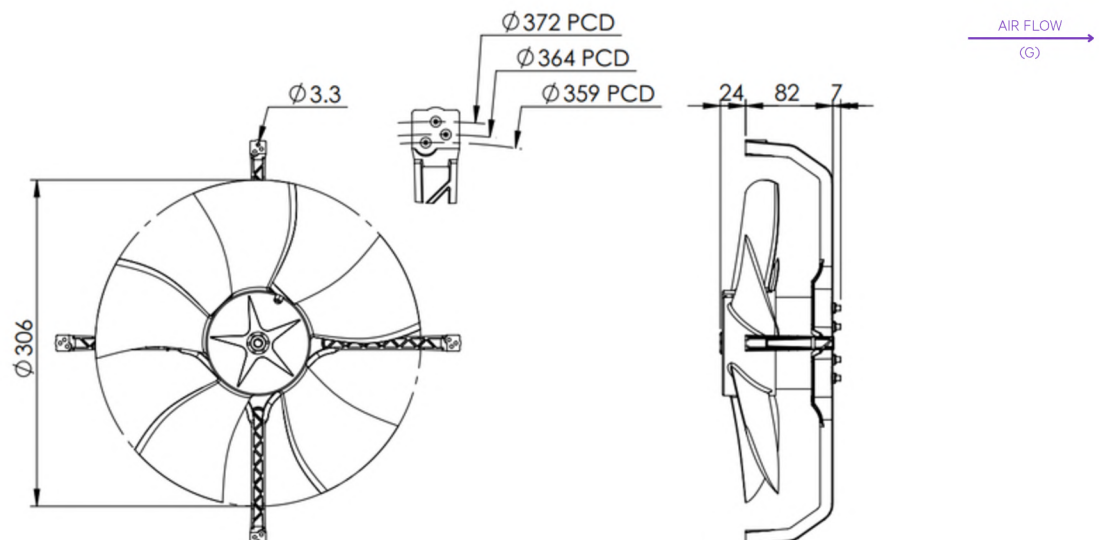


EXTERNAL VIEW


VK

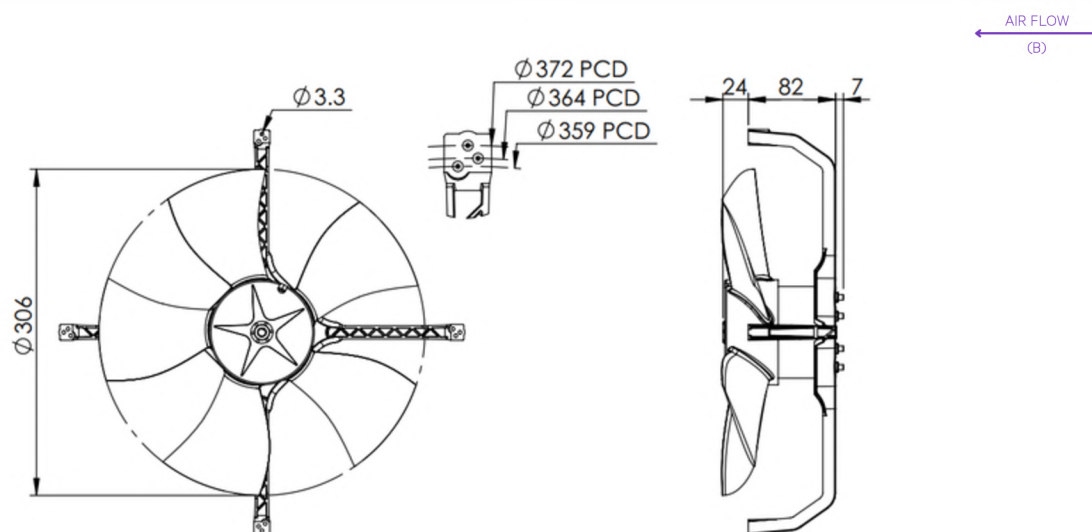

VL

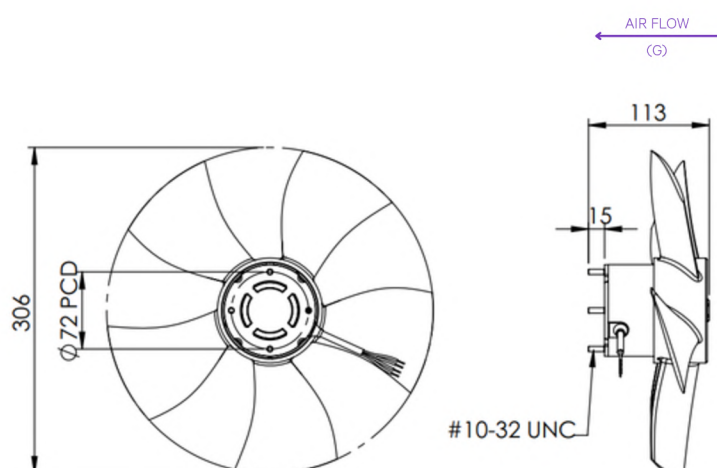

VM

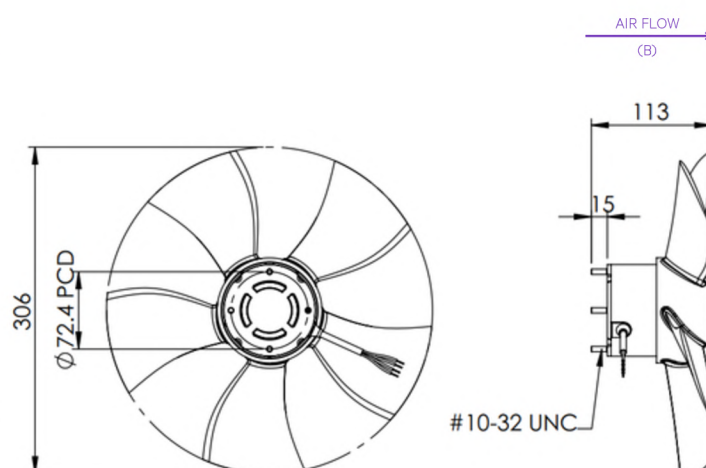

WIRING DIAGRAMS


Warning : Unconnected control (black) wires must be properly isolated from each other and from all power lines.
Do not earth unconnected control wires. Control wires operate at the same voltage as the power supply.



WA



WB

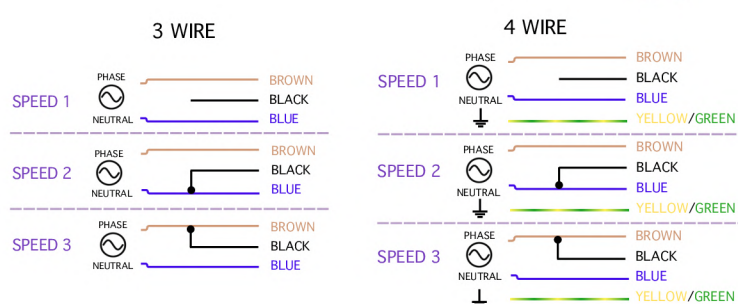


*Installer responsible for connecting motor to earth

UC 100 SERIES




EXTERNAL VIEWS

VN

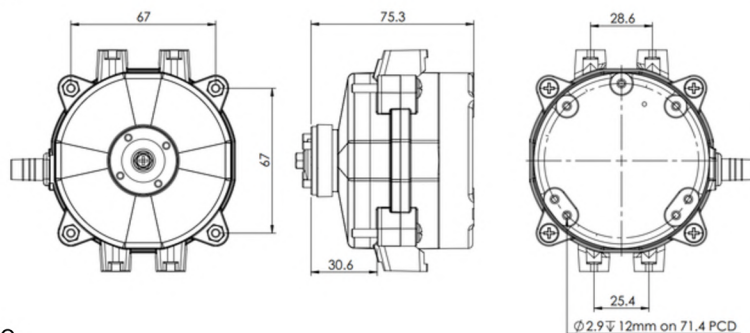

VO

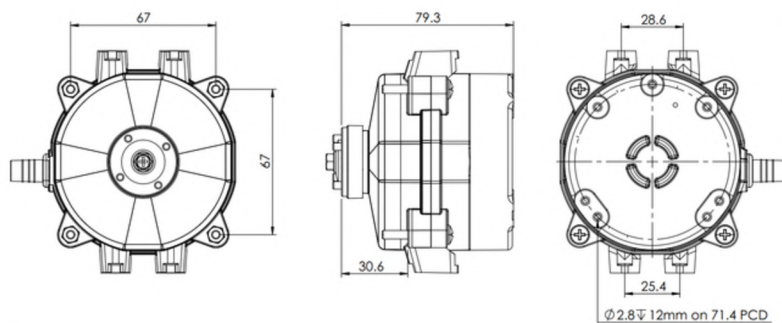


WIRING DIAGRAM

2 WIRE



3 WIRE



Dependable and customisable: the 100 Series is tailored for low-maintenance food retail, food service, and scientific applications. Compatible with natural refrigerants and highly efficient, its performance continuously helps OEMs meet new regulations. With a versatile programmable design and deep customisability, it streamlines production processes and simplifies inventory management.




SPECIFICATIONS

TEMPERATURE RANGE	:	-40°C to +50°C
DIRECTION OF ROTATION	:	CW; CCW
TIMED REVERSE	:	Optional; Programmable
INSULATION CLASS	:	Class B
SPEED SELECTION	:	3 Discrete Speeds; Programmable
GROUND PROTECTION	:	Double insulated
SHAFT DIAMETER	:	8mm; 7mm D; drive flange available
BEARINGS	:	Sealed ball bearings
INGRESS PROTECTION	:	IP66
HYDROCARBON COMPATIBILITY	:	EN60335-2-89 ANNEX BB

COMMERCIAL NAME	RATED VOLTAGE VAC	FREQUENCY Hz	PHASE	RATED CURRENT A	NOMINAL OUTPUT POWER W	RATED SPEED RPM	MOTOR PROTECTION	APPROVALS	WEIGHT kg	EXTERNAL VIEW
UC 12	120 / 230	50/60	1~	0.29/0.25	18	400 to 2400	Electronically protected (EP)	UL / CE / TÜV / ATEX	0.6	VN
UC+	120	50/60	1~	0.42	25	400 to 2400	Thermally Protected (TP)	UL / CE / TÜV / ATEX	0.6	VN
UC+	230	50/60	1~	0.25	25	400 to 2400	Thermally Protected (TP)	UL / CE / TÜV / ATEX	0.6	VN
UC miniMAX	110-240	50/60	1~	0.4 - 0.23	25	400 to 2000	Electronically protected (EP)	UL / CE / TÜV	0.6	VN
UC MAX	110-240	50/60	1~	0.7 - 0.4	30	400 to 2400	Electronically protected (EP)	UL / CE / TÜV	0.6	VO

UC 300 SERIES

The market leader for walk-in cooler fans: With a proven record of exceptional reliability, the 300 Series offers energy savings and a robust design. Unada's thermal management system ensures long-lasting operation even in harsh environments.



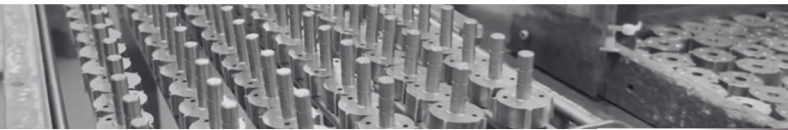


SPECIFICATIONS





TEMPERATURE RANGE	: -40 °C to +50 °C
DIRECTION OF ROTATION	: CW; CCW
TIMED REVERSE	: Optional; Programmable
INSULATION CLASS	: Class B
SPEED SELECTION	: 3 Discrete Speeds; Programmable
GROUND PROTECTION	: Class I
SHAFT DIAMETER	: 8mm; 7mm D; drive flange and twin shafts available
BEARINGS	: 608 sealed ball bearings
INGRESS PROTECTION	: IP55
MOTOR PROTECTION	: Electronically protected (EP)
THERMAL MANAGEMENT	: Torque compensation in overload conditions

EXTERNAL VIEWS

VP




VQ




Optional studs (front and rear)

WIRING DIAGRAM

3 WIRE

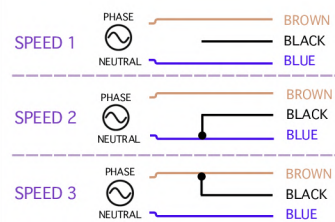


4 WIRE

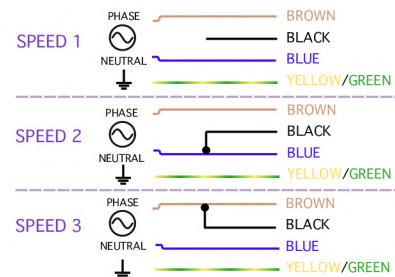


*Installer responsible for connecting motor to earth

COMMERCIAL NAME	RATED VOLTAGE VAC	FREQUENCY Hz	PHASE	RATED CURRENT A	NOMINAL OUTPUT POWER HP	RATED SPEED RPM	APPROVALS	WEIGHT kg	EXTERNAL VIEW
UC 39	120-240	50/60	1~	0.95/ 0.5	1/20	400 to 1800	UL	1.1	VP
UC 1	120	50/60	1~	0.9	1/15	200 to 2400	UL	1.3	VQ
UC 1	208-240	50/60	1~	0.6	1/15	200 to 2400	UL	1.3	VQ

UC 400 SERIES

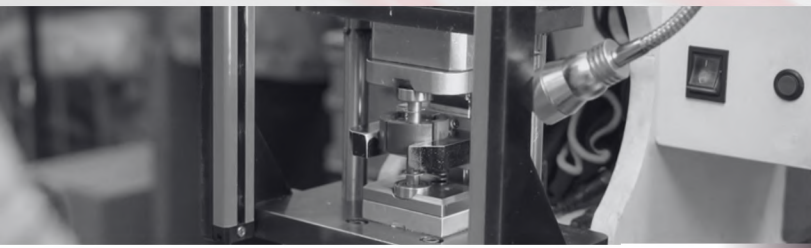


EXTERNAL VIEWS

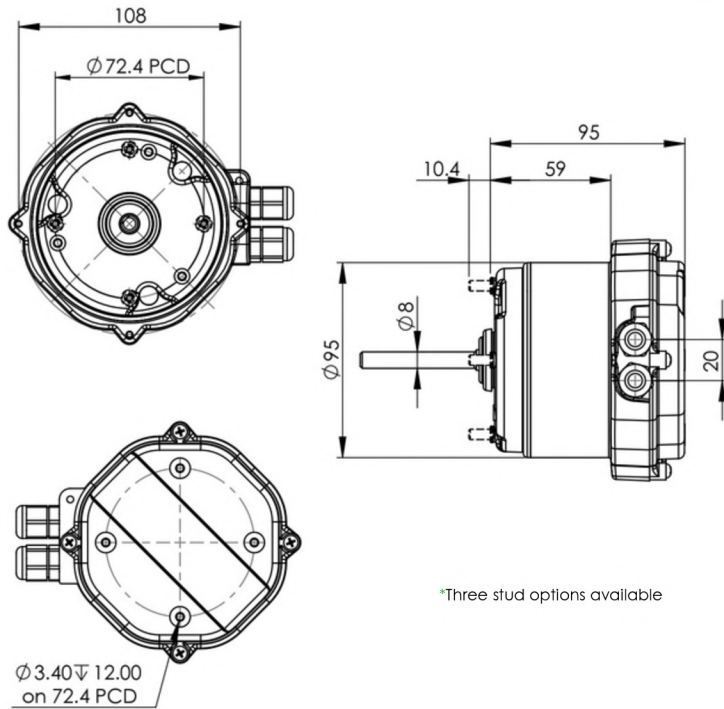


WIRING DIAGRAM

3 WIRE



4 WIRE



preliminary

*Installer responsible for connecting motor to earth

The UC 400 Series marks a major advancement in both innovation and motor capability, offering increased size and power to meet a broader range of applications. Developed through years of close collaboration with industry partners, this series incorporates the most sought-after qualities in a reliable, high-efficiency EC motor. Unada's largest and most adaptable motor family, the UC 400 is designed to perform across an exceptionally wide spectrum of refrigeration and HVAC systems. No matter the complexity of the application, it delivers the flexibility, dependability, and performance that define the UC range standard.



SPECIFICATIONS

TEMPERATURE RANGE	: -40°C to +50°C
DIRECTION OF ROTATION	: CW; CCW
TIMED REVERSE	: Optional; Programmable
INSULATION CLASS	: Class B
SPEED SELECTION	: 3 Discrete Speeds; Programmable, PWM
GROUND PROTECTION	: Class I
SHAFT DIAMETER	: 8mm; 7mm D; drive flange available
BEARINGS	: 608 sealed ball bearings
INGRESS PROTECTION	: IP66
HYDROCARBON COMPATIBILITY	: EN60335-2-89 ANNEX BB
MOTOR PROTECTION	: Electronically protected (EP)
THERMAL MANAGEMENT	: Torque compensation in overload conditions

COMMERCIAL NAME	RATED VOLTAGE VAC	FREQUENCY Hz	PHASE	NOMINAL OUTPUT POWER HP	RATED SPEED RPM	APPROVALS
UC 401	120 / 240	50/60	1~	1/15	400 to 2000	UL / ATEX
UC 405	120 / 240	50/60	1~	1/10	400 to 2000	UL / ATEX



UNADA

UNADAMOTOR.COM



CONTACT OUR TEAM:



Headquarters - Thailand

Unada Co., Ltd. 9/3 Moo 14, Kanjanaphisek Road,
Bangmuang, Bangyai, Nonthaburi 11140, Thailand.



: sales@unadamotor.com



North America

Jon Cole



: jon@unadamotor.com



Europe

Alija Dzemailji



: alija.d@unadamotor.com



Latin America

Thomas Bauer



: thomas@unadamotor.com



Asia, Oceania and Africa

Eduardo Strle



: eduardo@unada.co.th